

PIXEL  
STATIC




STATIC DECIMAL 5459, BALANCE 9975, FRAGMENT 9800

au 1800 150 554  
nz 0800 150 555  
[signaturefloors.com.au](http://signaturefloors.com.au)  
[signaturefloors.co.nz](http://signaturefloors.co.nz)


*Signature*

STATIC


PIXEL




RESOLUTION  
8242




COMPONENT  
5315




DECIMAL  
5459




DOT  
3586




PHASE  
2335




NOISE  
2261




SCREEN  
6074




RADIO  
6062




FLECK  
3365




GAME  
3366




DATA  
1940




CAPTURE  
6712




TECHNOLOGY  
4067




DIGITAL  
0419




SHAKE  
2131



SHUTTER  
4672




EXPOSURE  
7147



SYNC  
9447



ZOOM  
4594



BINARY  
8902



NUMERICAL  
1417



STATISTIC  
0099



FRAGMENT  
9800



PARTICLE  
1007



FRACTION  
0775



ALGORITHM  
8948



BALANCE  
9975




SQUARED  
1675



INGOT  
1700



COMPUTE  
1799

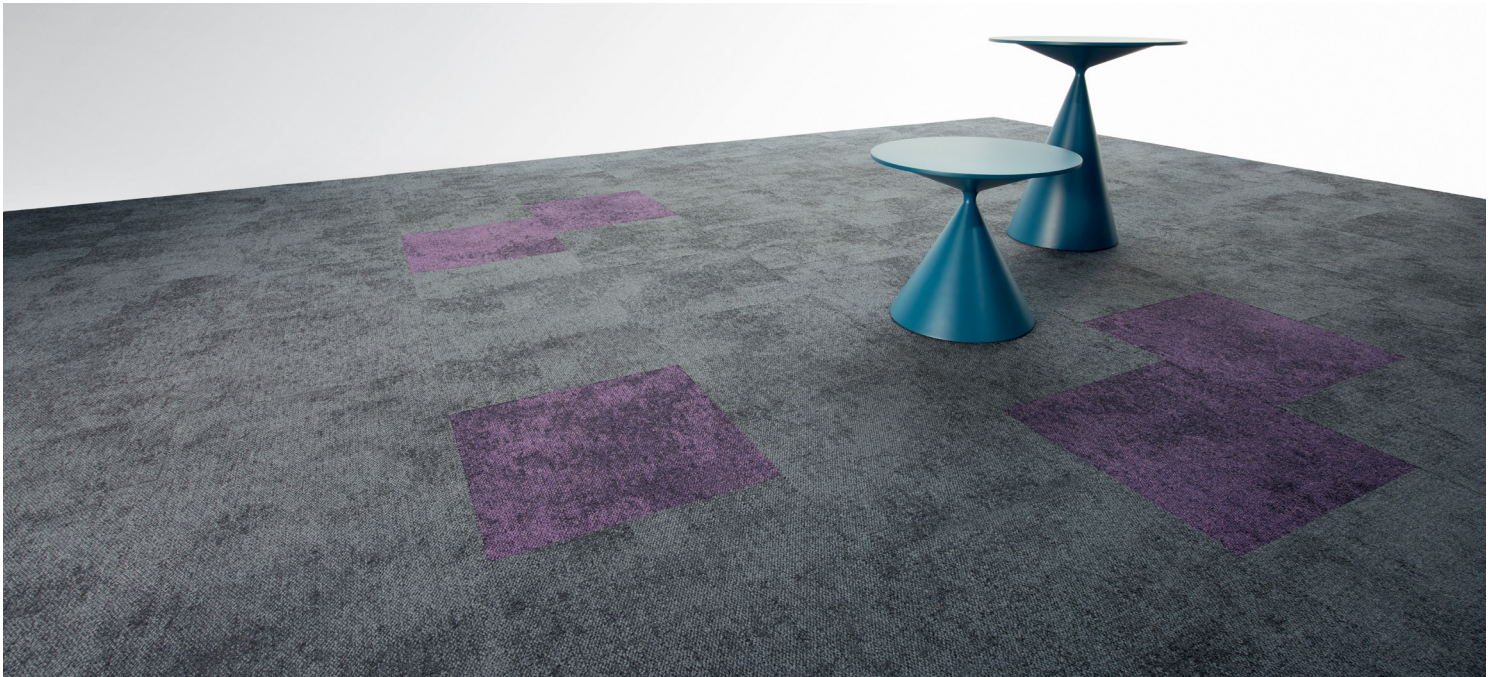

STATIC NUMERICAL 1417, GAME 3366


**SPECIFICATIONS**

<b>Collection</b>	Pixel
<b>Product</b>	Static
<b>Product Category</b>	Carpet Tile
<b>Construction</b>	Multi-level Loop
<b>Yarn/Fibre</b>	Solution Dyed Nylon
<b>Pile Weight</b>	646g/m <sup>2</sup> (19oz)
<b>Pile Height</b>	4mm
<b>Gauge</b>	1/10
<b>Tile Size</b>	500 x 500mm
<b>Total Thickness</b>	7.0mm
<b>Total Weight</b>	5.0kg/m <sup>2</sup>
<b>Carton Size</b>	5m <sup>2</sup>

**CUSTOM OPTIONS**

<b>Thermo Bak<sup>®</sup></b>	In stock
<b>Comfi Bak<sup>®</sup></b>	50m <sup>2</sup> minimum
<b>Flexi Bak<sup>®</sup></b>	50m <sup>2</sup> minimum
<b>Shapes by Signature<sup>®</sup></b>	50m <sup>2</sup> minimum

**INSTALLATION METHODS**



ASHLAR    QUARTER TURN    BRICK    DIRECTIONAL    RANDOM

**PERFORMANCE**

<b>Dimensional Stability</b>	<0.15%
<b>Backing</b>	Thermo Bak <sup>®</sup>
<b>Electrostatic Propensity</b>	<3.0kv
<b>Recommended Adhesive</b>	RLA Polymers GS300
<b>ACCS Rating</b>	Commercial Extra Heavy Duty
<b>Warranty</b>	15 Year
<b>Fire Rating ISO 9239.1</b>	6.5kw/m <sup>2</sup> Critical Radiant Flux Suitable all areas
<b>Stain/Soil</b>	Ultra Gard

**SUSTAINABILITY**

GreenTag<sup>®</sup> GreenRate Level A  
EPDs And Declare Labels  
WELL & LBC Eligible

**TECHNICAL DOCUMENTS**

[Technical Information Guide](#)  
[Care and Maintenance Guide](#)  
[Warranty Guide](#)

Our manufacturing process ensures no two tiles are the same. Please note that there may be batch variations from different dye lots.

